

TX-3535W15FC120-NGVEZW-B03E

PRODUCT SPECIFICATION

Features:

Chip Material:

Emitting Color:

Applications:

--	--	--	--	--	--

Absolute Maximum Ratings (Tc=25)

Parameter	Symbol	Ratings	Unit

Notes:

--	--	--	--	--	--

Electrical Optical Characteristics (Tc=25°C)



Parameter	Symbol	Condition	Min.	Typ.	Max.	Units

White light Color coordinate filing (IF=1.0A)


Notes:

--	--	--	--	--	--


Typical Electrical/Optical Characteristics Curves


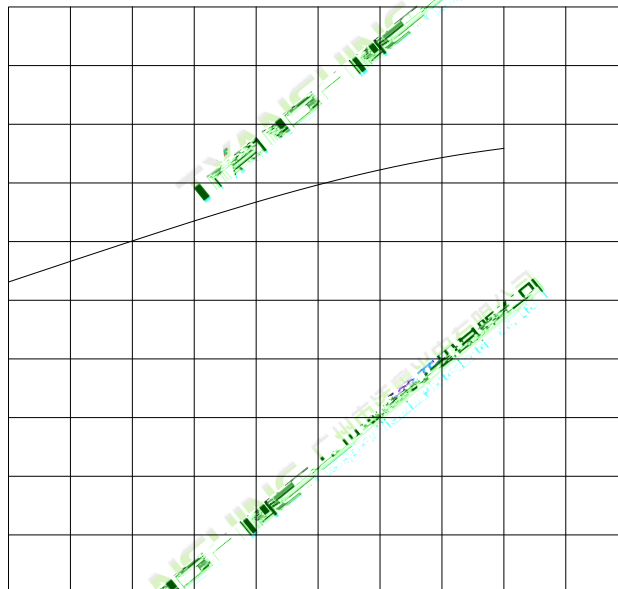
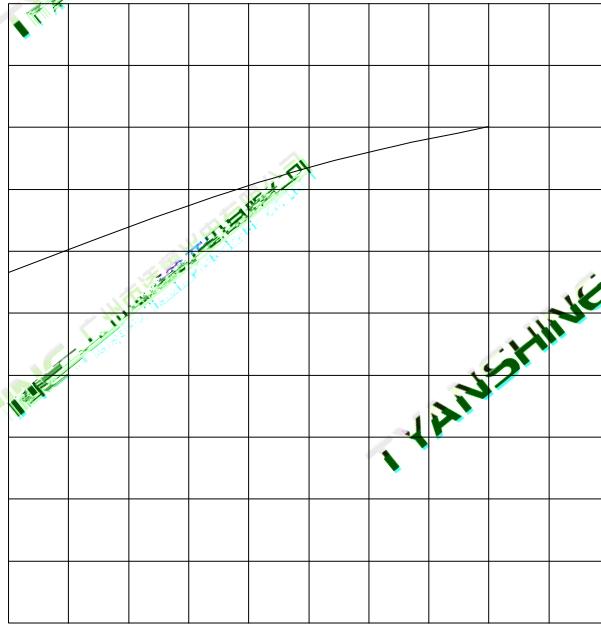


--	--	--	--	--	--

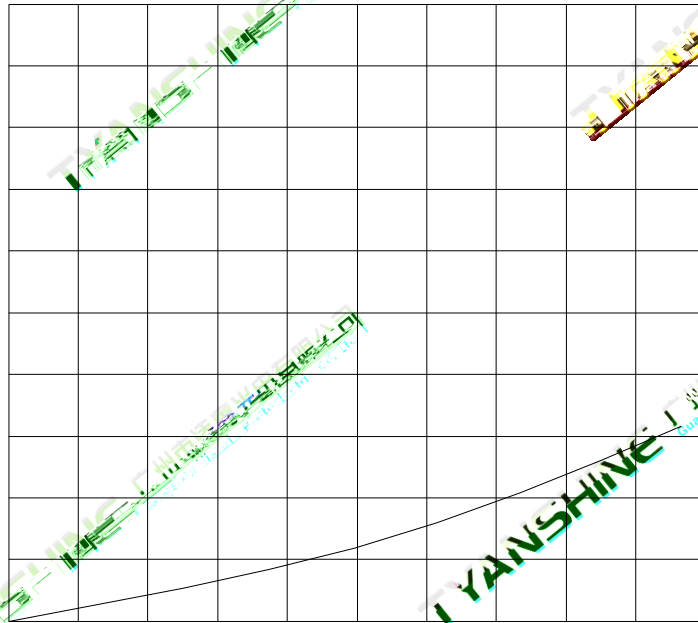

Temperature VS. Relative Luminous Flux (1)

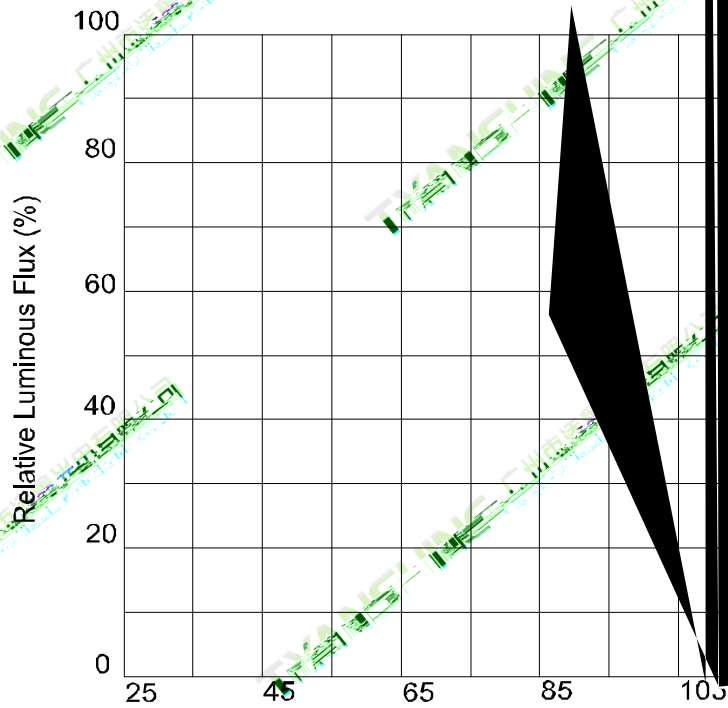

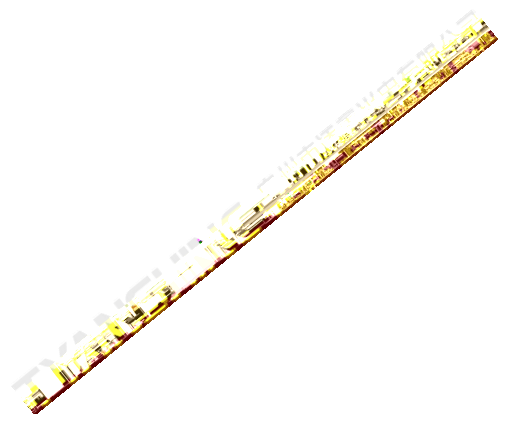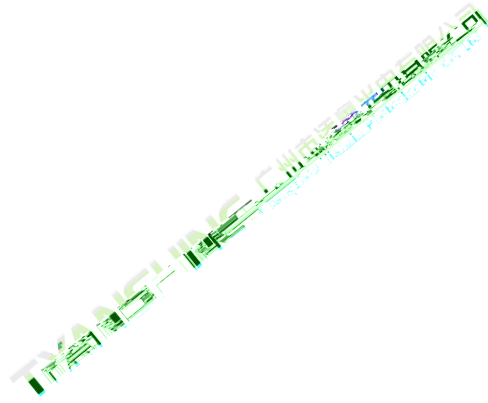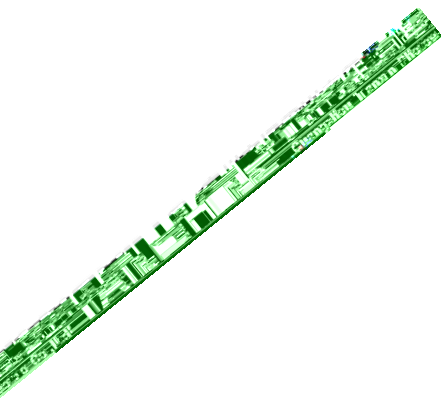

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd


有限公司
CO., LTD

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd

Usage Precautions

Storage Environment Condition

Soldering Condition

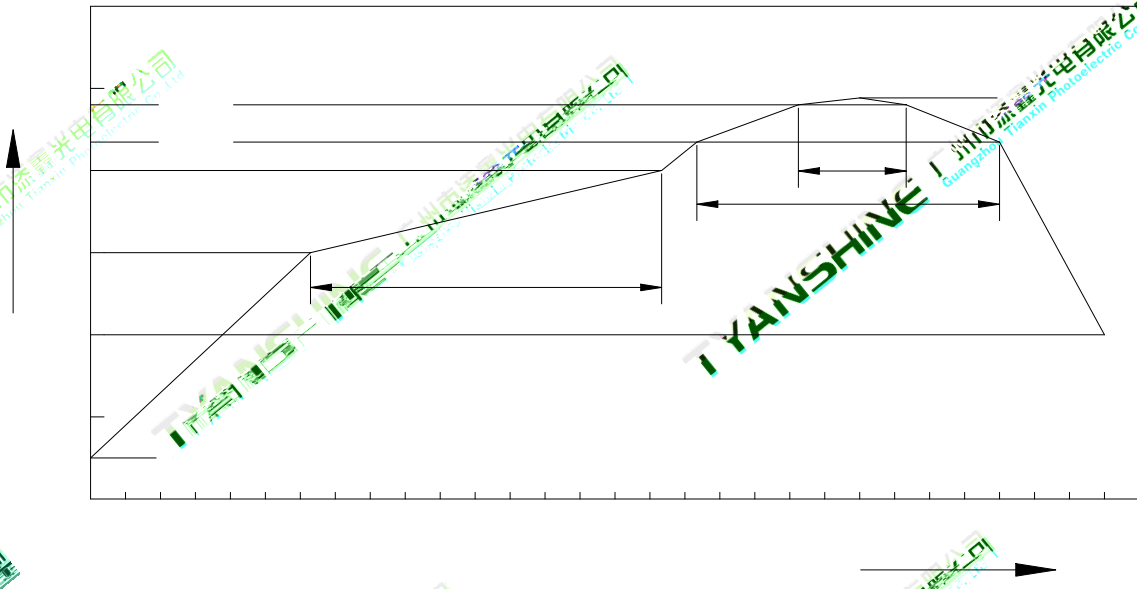



Profil-Charakteristik Profile Feature	Symbol	Pb-Free(SnAgCu)Assembly			Einheit Unit
		Minimum	Recommendation	Maximum	

Note:

--	--	--	--	--	--

Dimensions For Cannulation And Packaging

Quantity:1000 PCS

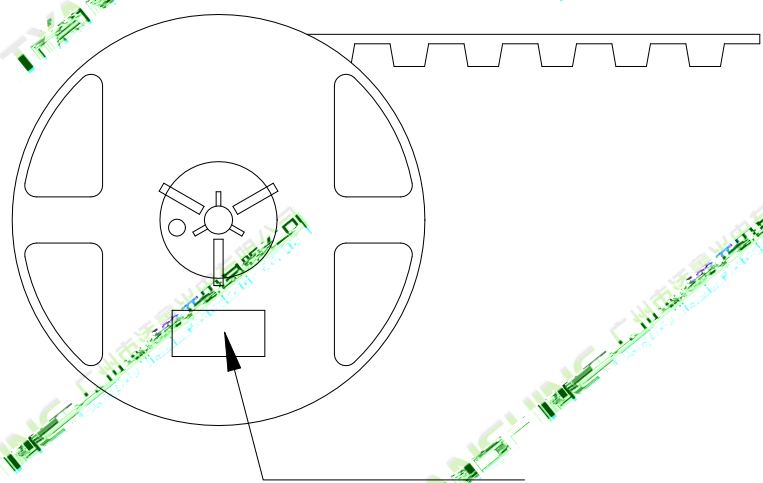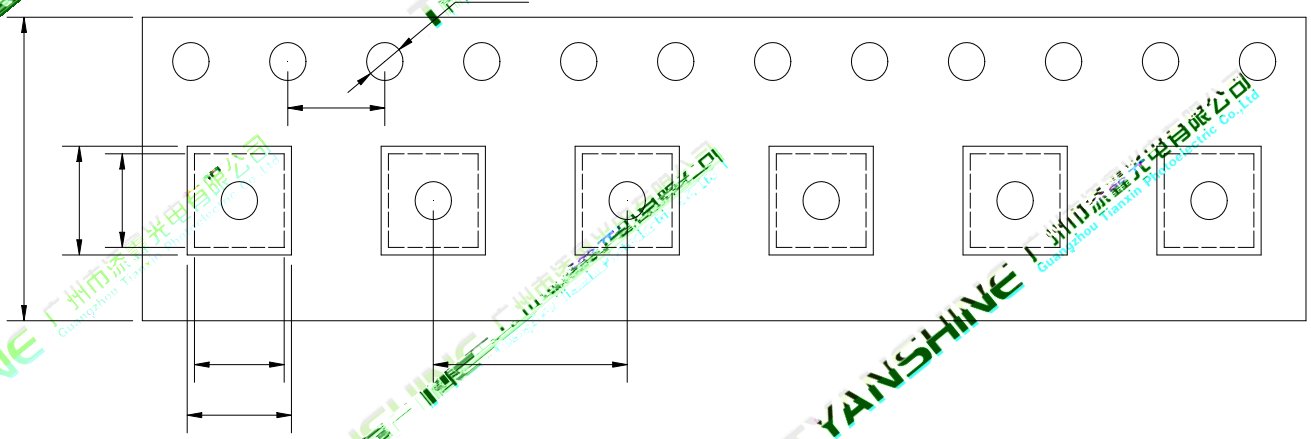

Notes:

--	--	--	--	--	--