


### Package Dimensions:

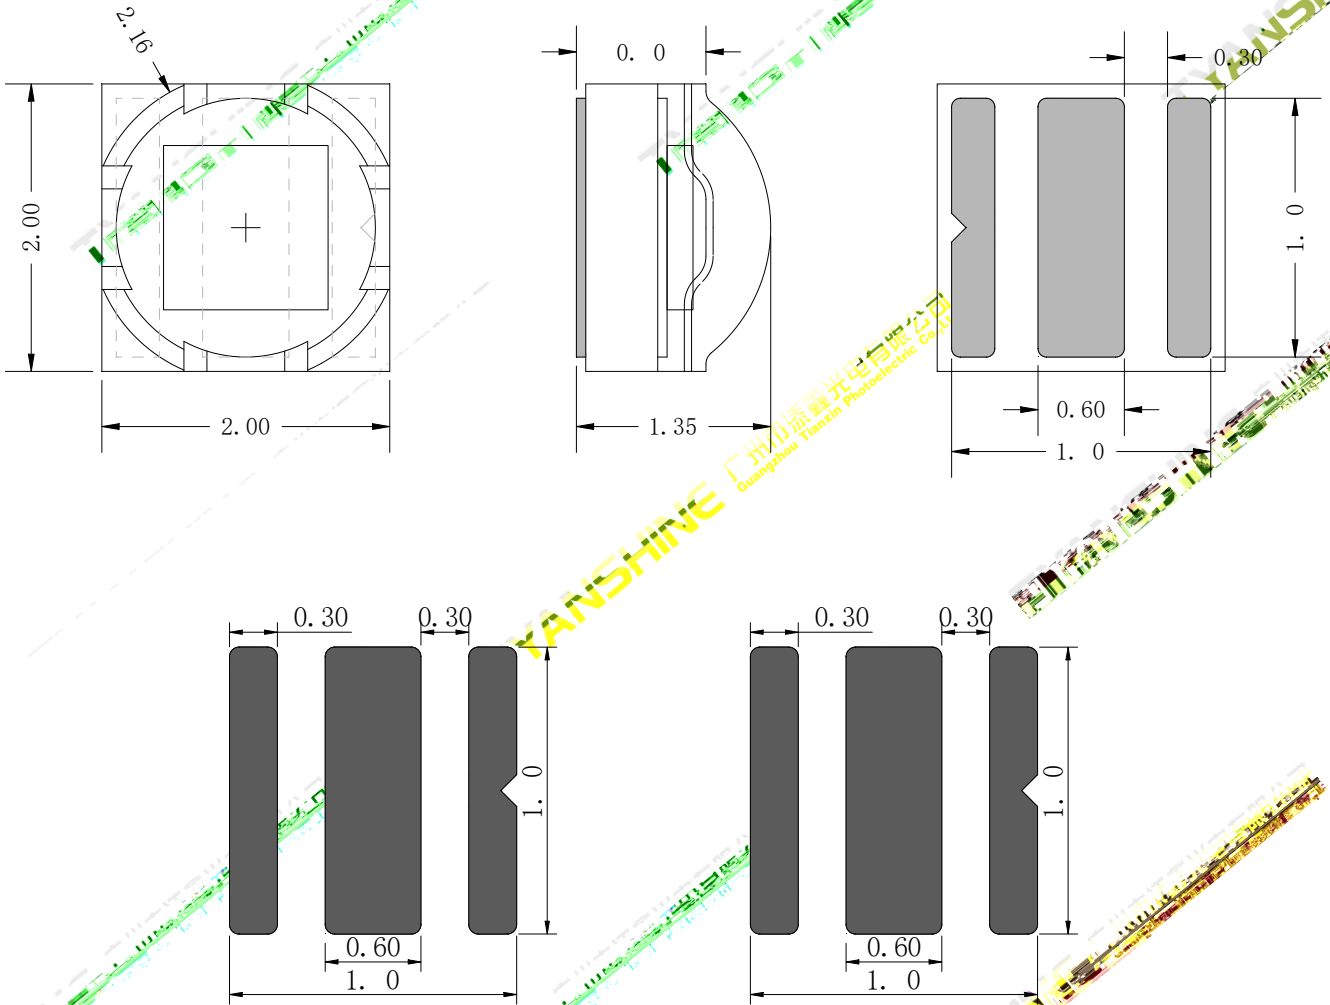

### Notes:

--	--	--	--	--	--

## Absolute Maximum Ratings (Tc=25 )

Parameter	Symbol	Ratings	Unit


Notes:

--	--	--	--	--	--

### Electrical Optical Characteristics (Tc=25°C IF=0.35A)



Parameter	Symbol	Min.	Typ.	Max.	Units

### White light Color coordinate filing (IF=0.35A)

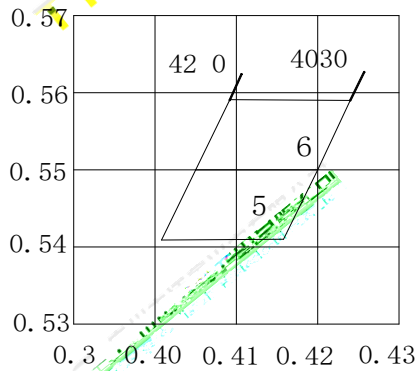


Notes:







--	--	--	--	--	--

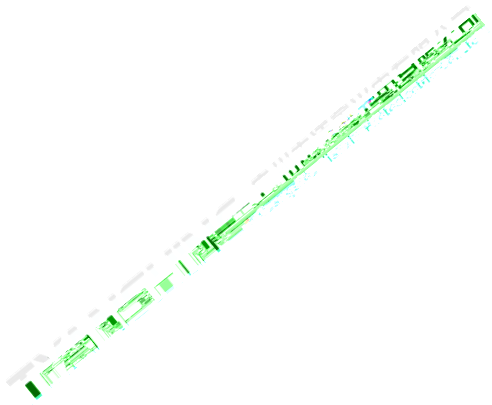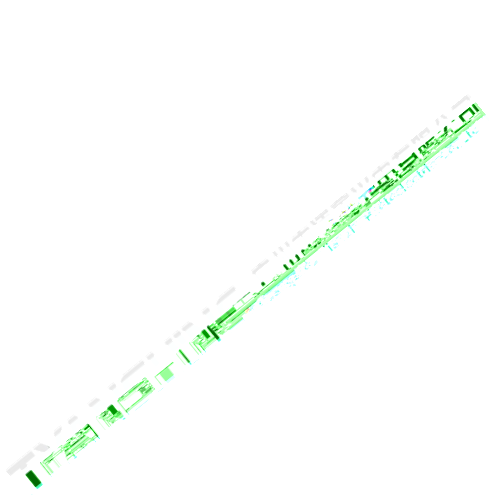

TYANSHINE  
Guangzhou Tianxin Photoelectric Co., Ltd



TYANSHINE  
广州天信光电有限公司  
Guangzhou Tianxin Photoelectric Co., Ltd

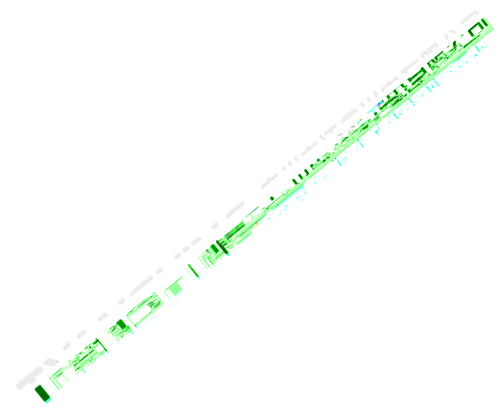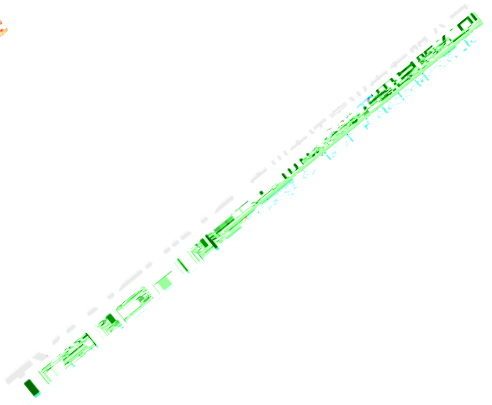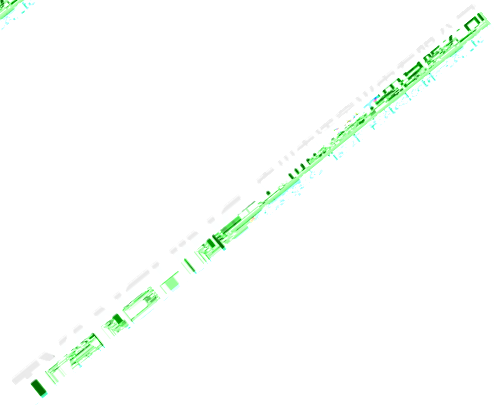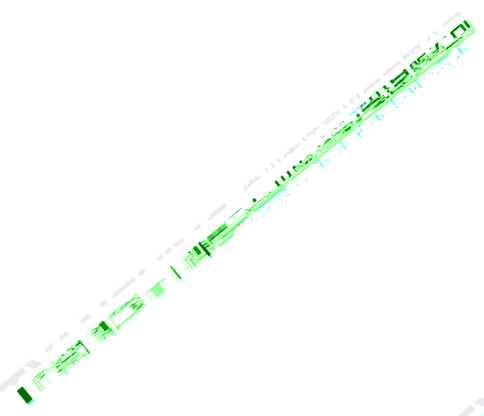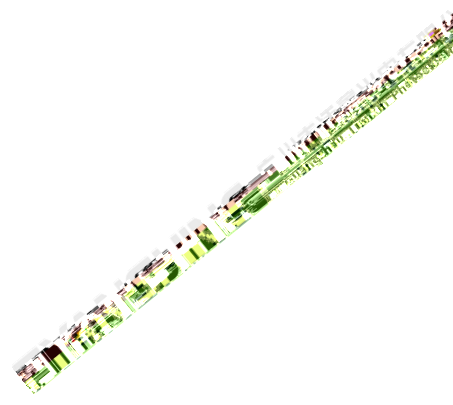




# Usage Precautions

## Storage Environment Condition



## Soldering Condition

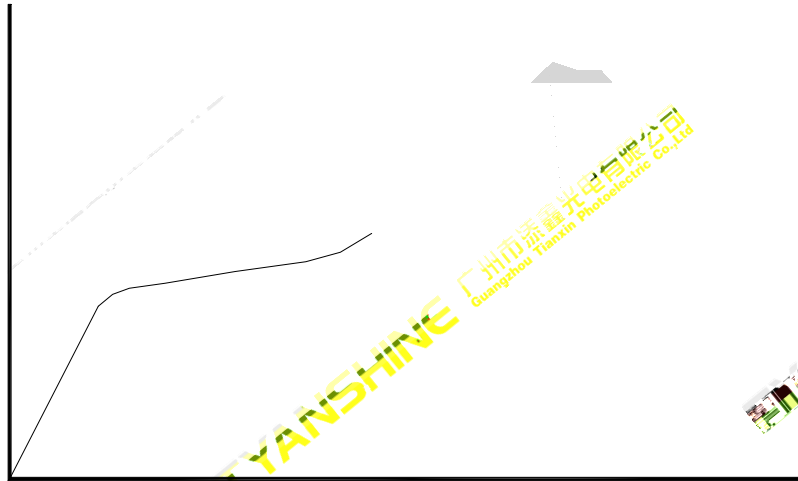

--	--	--	--	--	--

# Dimensions For Cannulation And Packaging

Quantity:2000 PCS

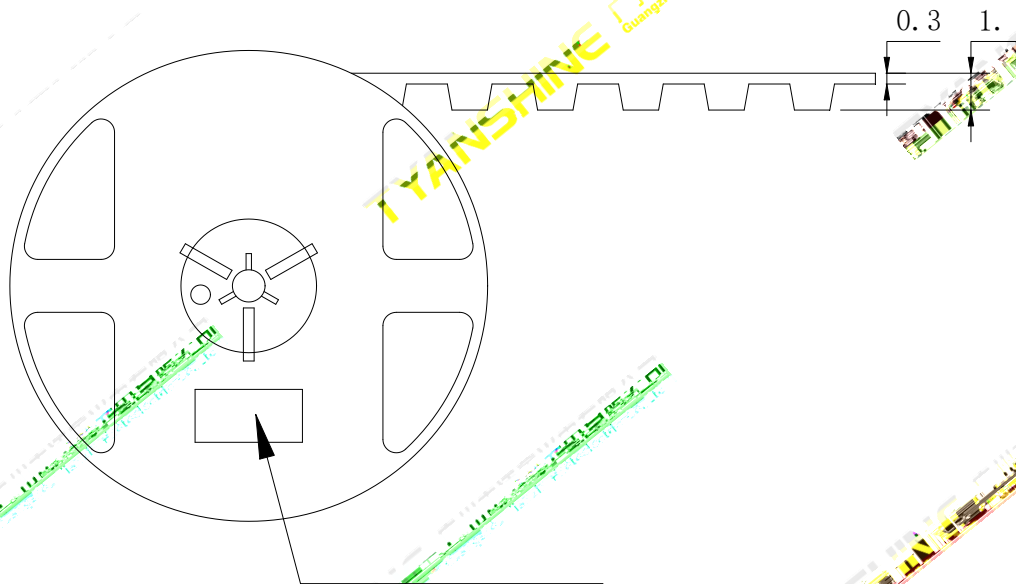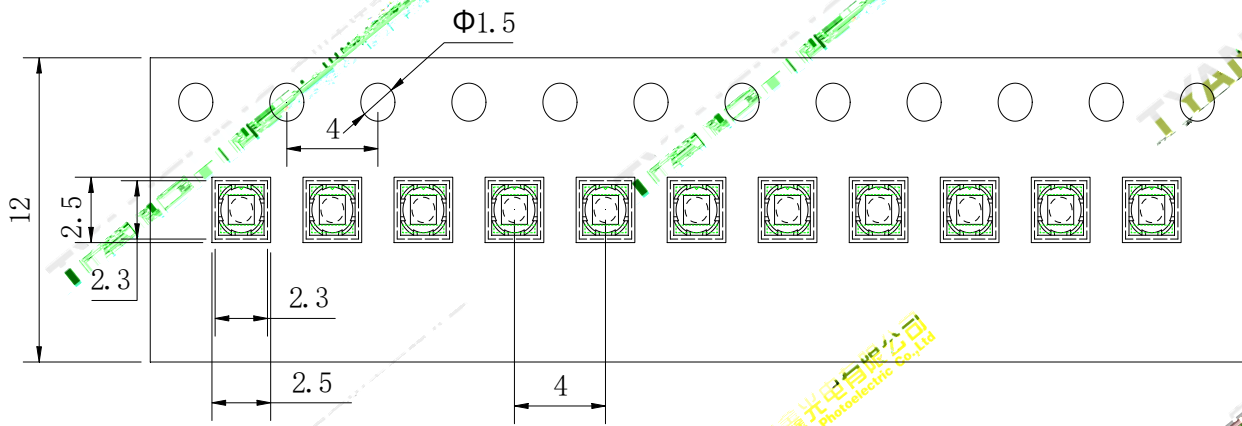

Notes:

--	--	--	--	--	--